



CD480E3
Dome Camera



- 1/3" Sony CCD
- 480 TVL Dome Camera
- 3.6 mm Fixed Lens
- Min Illumination : 0.3 Lux / F1.2
- DC 12V



DR480VF
Vari Focal Dome



- 1/3" Sony CCD
- 480TVL Dome Camera
- Varifocal Auto Iris 4~9mm Lens
- Min Illumination : 0.1 Lux/ F1.2
- 12VDC



CD600E3
Dome Camera



- 1/3" Sony Super HAD II CCD
- Effio-E DSP
- 600 TVL Dome Camera
- 3.6 mm Fixed Lens
- Min. Illumination : 0.1Lux / F1.2
- DC 12 V



CD700E3
Dome Camera




- 1/3" Sony ExView HAD II CCD
- Effio-E DSP
- 700 TVL Dome Camera
- 3.6 mm Fixed Lens
- Min. Illumination : 0.05Lux / F1.2
- S/w WDR
- OSD Control
- 12 VDC



ECD380F
Dome Camera




- 1/3" Color Sony II Super HAD CCD
- 540 TVL, Min illumination 0.5Lux
- 3.6mm lens,
- 12VDC

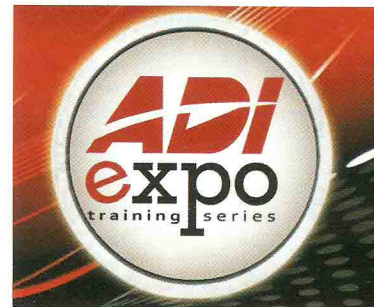

ADI expo 2012
training series

- Face to face Interactions
- Informative Seminars
- Demo/Display and discussions
- New product introductions




ECD360V
Vari Focal Dome



- Vari Focal Dome Camera
- 1/3" Sony Super HAD CCD
- Built-in 3.5~8.5mm VariFocal Lens
- 540 TVL
- Minimum Illumination : 0.12 LUX @ F1.6



EHD360
Vari Focal Dome



- 1/3" Sony CCD,
- 540TVL, Vandalproof outdoor dome
- IP66, 3.5-8.5mm lens
- DC12V



EHD350HQ-PV8CGR
Vari Focal Dome



- 1/3" Sony Super HAD CCD
- 560TVL Color Vandal Dome
- IP 66, 3.8~9.5mm Vari-Focal Lens
- 0.5 Lux/F=1.2, 12 VDC / 24 VAC



ED610x
Vari Focal Dome



- 600 TVL High Resolution CCD Sensor
- Vari-Focal DC Iris Lens 2.8~10mm
- 3-Axis



EHD650V
Vari Focal Dome



- Sony Effio-E, 650 TVL
- Min illumination 0.5Lux
- Vari-focal lens of 4-9mm lens
- Vandal Proof Housing
- Power supply 12VDC



DS2CC523P
Dome Camera



- 500 TVL Dome
- 1/4" DIS Sensor
- Min Illumination : 0.1 Lux @ F1.2
- 3.6 mm Fixed Lens

SAMSUNG
SAMSUNG TECHWIN



SID-50P
Dome Camera

- 1/3" super HAD CCD-
Color : 540 TV Lines
- 0.3 lux (Color)
- Fixed Lens 3 mm, BLC, SSNR
- Sharpness Control, Sens-up

SAMSUNG
SAMSUNG TECHWIN



SCD-2010P
Dome Camera

- 1/3" CCD, Built-in auto iris fixed lens :
3mm
- High resolution of 600TV lines
- Min. illumination of 0.04Lux@F1.2

SAMSUNG



SCD-2020P
Dome Camera

- 600 TVL
- Built in 3.7 mm fixed lens
- Min Illumination of 0.15 Lux @ F1.2
- 1/3" Super HAD CCD

SAMSUNG
SAMSUNG TECHWIN



SCD-2080P
Vari Focal Dome

- High Resolution Varifocal Dome Camera
- 600TV lines
- Built-in 3.6x (2.8 ~ 10mm) varifocal lens

SAMSUNG
SAMSUNG TECHWIN



SCD-3080P
Vari Focal Dome

- High Resolution WDR Varifocal
Dome Camera
- 1/3" CCD, Built-in 3.9x (2.8 ~ 11mm)
varifocal lens with auto iris
- High resolution of 600TV lines (Color)

SAMSUNG
SAMSUNG TECHWIN



SCV-2080P
Vari Focal Dome

- High Resolution Vandal-Resistant Dome Camera
- 1/3" CCD, Built-in 3.6x (2.8 ~ 10mm)
varifocal lens with auto iris
- Day & Night with ICR (Infrared Cutoff Removal)
- High resolution of 600TV lines (Color)
- Protection against water & dust (IP66)

SAMSUNG
SAMSUNG TECHWIN



SCV-3080P
Vari Focal Dome

- 1/3" High Resolution WDR Vandal-Resistant
Dome Camera
- Built-in 3.9x (2.8 ~ 11mm) varifocal lens with
auto iris
- Day & Night with ICR (Infrared Cutoff Removal)
- High resolution of 600TV lines (Color)
- Protection against water & dust (IP66)

Panasonic
ideas for life



CF-102
Dome Camera

- 1/4" CCD 540 TVL
- 2.5 mm Fixed lens
- 1.2 Lux (Color) / 0.9 lux (B/W) at F 2.0
- Easily mountable on ceiling and walls
- Adaptive Black Stretch (Enhances the
visibility of dark Area)
- 12 VDC Power Supply

Panasonic
ideas for life



WV-CW500
Dome Camera

- 1/3" Interline Transfer CCD
- Horizontal Resolution : 650 TV Lines
- Minimum Illumination : 0.1 lux (Color) / 0.01 lux (B/W)
- Super dynamic 5 delivers superior image
- Adaptive Black Stretch and Intelligent
Video Motion Detection

Panasonic
ideas for life



WV-CF334E
Vari Focal Dome

- 1/3 inch CCD Day/Night Fixed Dome
Camera,
- High sensitivity 0.6 lx (Color) 0.4 lx (B/w) at
F1.3 wide/ 2.8mm - 10mm 3.6x varifocal Auto
Iris lens/Adaptive Black stretch
enhances visibility of dark areas/ 24 V AC or 1
2 V DC :PAL

Honeywell



HDC-890P-36
Dome Camera

- 1/3" CCD with icore™ DSP
- 580 TV Lines, Enhanced BLC with WDR, BMB
- 3.6mm fixed lens
- 0.001Lux Minimum Illumination,
- Digital Noise Reduction
- 12VDC

Honeywell



HDC-890PV
Vari Focal Dome

- 1/3" CCD with icore™ DSP
- 580 TV Lines, Enhanced BLC with WDR, BMB
- 2.8mm ~ 10 mm varifocal lens
- 0.001Lux Minimum Illumination,
- Digital Noise Reduction
- Day & Night
- 12VDC



IS20 Camera Series

Dome Camera



- Fully Integrated Indoor Enclosure with Camera and Lens
- Day/Night Wide Dynamic Range (WDR)
- Varifocal Lens
- 24 VAC or 12 VDC Operation, Autosensing

Box Cameras



CB600E3

Box Camera



- 1/3" Sony Super HAD II CCD
- Effio-E DSP
- 600 TVL Box Camera
- 3.6 mm Fixed Lens
- Min. Illumination : 0.1Lux / F1.2
- S/w WDR, OSD Control
- DC 12V; Lens not included



CB700E3

Box Camera



- 1/3" Sony ExView HAD II CCD
- Effio-E DSP
- 700 TVL Box Camera
- 3.6 mm Fixed Lens
- Min. Illumination : 0.05Lux / F1.2
- S/w WDR, OSD Control
- 12 VDC; Lens not included



EQ360

Box Camera



- 1/3" Sony Super HAD CCD,
- 0.1 Lux/ F=1.2
- 540TVL, OSD
- BLC,AGC, Flickerless,AWB
- DC12



EQ350AHQ-PMMGR

Box Camera



- 1/3" Sony SUPER HAD CCD
- 560 TVL Color Camera
- 0.5 Lux/F=1.2, Auto IRIS
- w & w/o Audio
- 12VDC/24VAC



EI350HQ-PV8NGR

Box Camera



- 1/3" Sony super HAD CCD
- 560 TVL, 0.5 lux/F=1.2
- Integrated Color camera
- Vari-Focal Lens 9~22mm
- 12VDC/24VAC



EQ610x

Box Camera



- 600 TVL High Resolution CCD Sensor
- Easy to use OSD Setup Menu
- Built-in DNR, D-WDR & Easy Day/Night function



EQ610e

Box Camera



- 700 TVL 1/3" Sony EXview HAD CCD II
- Sony Effio-E
- True Day/Night with ICR module



SDC-313B

Box Camera



- 1/3" CCD
- Color : 530 TV Lines
- 0.3 lux (Color)
- BLC, SSNR
- Privacy Masking, MD



SCB-2000P

Box Camera



- High resolution of 600TV lines
- DIS (Digital Image Stabilization)
- Min. illumination 0.05Lux@F1.2 (Color)



SCB-3000P

Box Camera



- High resolution 600TV lines
- Low light sensitivity of min. 0.1Lux
- WDR (Wide Dynamic Range)



WV-CP280

Box Camera



- 1/3" CCD
- 540 TVL (0.8 lux, F 1.4)
- Adaptive Black Stretch
- 220 ~ 240 V AC
- Lens Optional (not supplied with the camera)



Panasonic
ideas for life



WV-CP500
Box Camera

- 1/3" Interline Transfer CCD
- Horizontal Resolution : 650 TV Lines
- Minimum Illumination : 0.1 lux (Color) / 0.01 lux (B/W)
- Super dynamic 5 delivers superior image
- Adaptive Black Str etch and Intelligent Video Motion Detection

Honeywell



HCD890X
Box Camera

- 1/3" CCD with icore™ DSP
- 580 TVL, Enhanced BLC with WDR, BMB, DNR
- 0.001Lux Minimum Illumination,
- Digital Noise Reduction
- True Day & Night
- 12VDC



C10CH Series
Box Camera



- 1/3" Format CCD Imager
- 540 TV Lines
- 0.4 lux Sensitivity
- Autosensing DC/Video Drive Auto Iris
- Automatic Gain Control, Electronic Shutter Control, and Backlight Compensation
- Flickerless mode



CCC1390H Series
Box Camera



- 1/3" format Sony SS-2WD CCD Imager
- 530 TV Lines (Black & White); 480 TV Lines (Color)
- Digital Signal Processing
- Auto White Balance, AGC, ESC, and Backlight Compensation
- Autosensing DC-drive auto iris
- Day / Night with automatic or manual control
- Lens sold separately

IR Cameras



CD480IRE3
Infra Red

- 1/3" Sony CCD
- 480TVL IR dome
- 3.6mm Fixed Lens
- Min Illumination : 0.3 Lux / F1.2 (IR LED Off), 0 Lux (IR LED on)
- 10 ~ 15m IR Visible Range



CD600IRE3
Infra Red

- 1/3" Sony Super HAD II CCD
- Effio-E DSP
- 600 TVL IR Dome Camera
- 3.6 mm Fixed Lens
- Min. Illumination : 0.1 Lux/F1.2, 0 Lux (IR LED On)
- DC 12 V
- IP 6



CD700IRE3
Infra Red

- 1/3" Sony ExView HAD II CCD
- Effio-E DSP
- 700 TVL IR Dome Camera
- 3.6 mm Fixed Lens
- Min. Illumination : 0.1 Lux/F1.2, 0 Lux (IR LED On)
- S/w WDR
- OSD Control
- IP 66



CBL480IR10F
Infra Red

- 1/3" Sony CCD
- 480TVL IR Bullet Camera
- 3.6mm fixed lens
- 10m IR Range
- Min Illumination : 0.3 Lux / F 1.2, 0 Lux (IR LED on)
- DC 12 V, IP 66



CBL480IR30VF
Infra Red

- 1/3" Sony CCD
- 480TVL IR Bullet Camera
- Varifocal Auto Iris 4 ~ 9 mm Lens
- 30m IR Range
- Min Illumination : 0.3 Lux / F 1.2, 0 Lux (IR LED on)
- DC 12 V, IP 66



CVD480IR30VF
Infra Red

- 1/3" Sony CCD
- 480TVL IR Dome Camera
- Varifocal Auto Iris 4 ~ 9 mm Lens
- 25 m ~ 30m IR Range
- Min Illumination : 0.3 Lux / F 1.2, 0 Lux (IR LED on)
- DC 12 V, IP 66

EverFocus®



EBD255
Infra Red

- 1/3" Sharp CCD
- Indoor IR Mini Color Dome Camera
- 420TVL
- IR Distance : 10~15m
- Minimum Illumination : 0 LUX with built-in IR-LED

EverFocus®



ECZ255
Infra Red

- 1/3" Sharp CCD, 420 TVL
- 10 mts IR bullet
- IP 66 weather proof
- 3.6 mm lens/F=2.0,
- 12 VDC



EverFocus®

EBD360
Infra Red



- 1/3" Sony, 540TVL
- Vandalproof IR dome
- 25m IR, IP 66
- 3.7-12mm lens,
- DC12V

EverFocus®

ED630x
Infra Red



- 600 TVL
- Vari Focal DC Iris Lens 2.8~10 mm
- Upto 15m/~50 ft. range
- True Day/Night with ICR Module
- OSD Setup menu
- Built-in DNR, D-WDR functions

EverFocus®

ED630s
Infra Red



- 700 TVL 1/3" Sony EX view HAD CCD II
- Sony Effio-S Platform
- Vari Focal DC Iris Lens 2.8~10 mm
- Upto 15m/~50 ft. range
- True Day/Night with ICR Module

EverFocus®

EZ650
Infra Red



- 1/3" Sony super HAD CCD II sensor
- 560 TVL, 0.0002Lux/F=1.2 (AGC ON), 0Lux (IR ON)
- Motorised VF/Al 6-50mm lens
- IP 66, Weather proof 80M IR camera
- 12 VDC/24 VAC

HIKVISION

DS2CC523PIRP
Infra Red



- 500 TVL IR Dome
- 1/4" DIS Sensor
- Min Illumination : 0.1 Lux @ F1.2, 0 Lux wit IR
- 3.6 mm fixed Lens

HIKVISION

DS2CC123PIR
Infra Red



- 500 TVL IR Bullet
- 1/4" DIS Sensor
- Min Illumination : 0.1 Lux @ F1.2, 0 Lux wit IR
- 3.6 mm fixed Lens

SAMSUNG

SCD-2020RP
Infra Red



- 600 TVL
- Min. illumination 0Lux (IR LED on)
- IR distance 7m
- Built-in fixed lens (3.6mm)

SAMSUNG

SAMSUNG TECHWIN

SCD-2080RP
Infra Red



- 1/3" High Resolution IR Dome Camera
- High resolution of 600TV lines (Color), Min. illumination 0Lux (IR LED on)
- IR distance 20m, 3.6x V/F lens (2.8 ~ 10mm), True Day & Night (ICR),

SAMSUNG

SAMSUNG TECHWIN

SCO-2080RP
Infra Red



- 1/3" High Resolution Varifocal Lens IR LED Camera
- Built-in 3.6x (2.8 ~ 10mm) varifocal lens with auto iris
- Day & Night with ICR (Infrared Cutoff Filter Removal)
- Protection against water & dust (IP66), Sunshield, High resolution of 600TV lines (Color)

SAMSUNG

SAMSUNG TECHWIN

SCO-2120RP
Infra Red




- High Resolution IR LED Camera
- 12x Zoom, 12x optical zoom (3.9 ~ 46mm)
- Dustproof & waterproof integrated camera housing rated to IP66

Honeywell

VDC350PI
Infra Red



- IR Fixed Dome Camera
- 1/3" Sony CCD
- 540 TVL
- 3.6 mm Fixed Lens
- 15m IR Visible Range

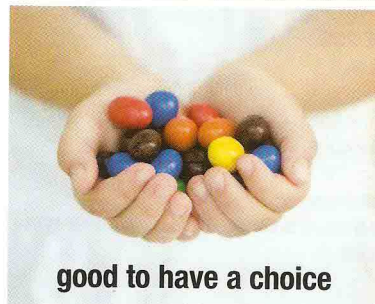

the power to
choose

ADI empowers you to choose products from more than 50 renowned security brands and bringing in latest technology for you to take a business leap.

good to have a choice

ADI
GLOBAL DISTRIBUTION



Honeywell

HDC-515PI-36

Infra Red



- 1/3" Sony CCD, 550 TVL
- Built-in 18IR Lamps
- Zero Lux with IR Lamp on
- 3.6mm fixed lens
- Dual Power – 12 VDC/ 24 VAC

Honeywell

VBC800PI

Infra Red



- IR Vari-focal Bullet camera
- 540 TVL
- 1/3" Sony CCD
- 4 ~ 9 mm Varifocal lens
- 25m IR Visible Range

Speed Dome / PTZ Camera

EverFocus®

EPTZ430

18 x ~ 27x



- Indoor Recessed Day / Night High Speed Dome
- 22X Optical Zoom
- 1/4" Super HAD CCD
- 540 TVL

EverFocus®

EPTZ830

18 x ~ 27x



- Outdoor IP 66 Day / Night High Speed Dome
- 22X Optical Zoom
- 1/4" Super HAD CCD
- 540 TVL
- Auto heater and fan
- Weatherproof IP66 rated

EverFocus®

EPTZ3650I

>27x



- 1/4" Sony Ex view super HAD CCD,
- 530 TVL,
- True Day/Night with IR cut filter,
- Auto Tracking, RS 485 communication

EverFocus®

EPTZ3650

>27x



- 1/4" Sony Ex view super HAD CCD
- 530 TVL
- True Day/Night with IR cut filter
- Auto Tracking, RS 485 communication
- Weatherproof IP66 rated

SAMSUNG

SCP-2120P

<18x



- 1/4" Super HAD CCD
- 600TV lines high resolution
- 12x optical zoom (3.9 ~ 46mm)
- 360° continuous rotation

SAMSUNG

SCP-3120P

<18x



- 1/4" Ex-view HAD color CCD
- Powerful 12x optical zoom (3.6 ~ 44.3mm) and 16x digital zoom
- High resolution of 600TV lines (Color), 700TV lines (B/W)
- Min. illumination of 0.7Lux@F1.67 (Color)
- Voltage : 24V AC

SAMSUNG

SAMSUNG TECHWIN

SCP-3120VHP

<18x



- 1/4" Ex-view CCD
- 12x optical zoom (3.6 ~ 44.3mm) and
- True Day & Night (ICR),
- High resolution of 600TV lines (Color)
- Integrated Housing
- Vandal-Resistant PTZ Dome Camera

SAMSUNG

SAMSUNG TECHWIN

SCP-3430HP

>27x



- 43x Zoom High Resolution PTZ Dome Camera IP66
- Outdoor, WDR support, High resolution of 600TV lines (Color)

SAMSUNG

SCP-2250HP

18 x ~ 27x



- 25x Weatherproof PTZ Dome Camera
- 1/4" Super HAD color CCD
- 25x optical zoom (3.66 ~ 91.36 mm) and 16x digital zoom
- True Day & Night (ICR)
- 600TV lines (Color) / 700 TVL (B/W)
- WDR
- Min Illumination : 0.2 Lux @ F1.65 (Color), 0.02 Lux (B/W)
- IP66

SAMSUNG

SCP-2270HP

18 x ~ 27x



- High Resolution 27x PTZ Dome Camera
- High resolution of 600TV lines (Color), 700TV lines (B/W)
- Min. illumination 0.2Lux@F1.6 (Color), 0.02Lux (B/W)
- 27x zoom (3.5 ~ 94.5mm)
- IP66
- 24V AC



Honeywell

HSD-261P
18x~27x



- 26X Optical, 12X Digital Zoom
- 1/4" ExView HAD CCD, 480TVL (Color Mode), 520TVL(B/W Mode)
- True day/night, IP66 standard, lighting & surge protector
- High strength metal housing with heater and fan
- 8 privacy mask zones

Honeywell

HSD-361P
>27x



- 36X Optical, 12X Digital Zoom
- 1/4" ExView HAD CCD, 480TVL (Color Mode), 520TVL(B/W Mode)
- True day/night, IP66 standard, lighting & surge protector
- High strength metal housing with heater and fan
- 6 Vector scan groups, 8 privacy mask zones




Spectra IV SE Series PTZ Systems



- Available in 23X, 27X, & 35X Models
- 2 Autofocus, High Res Integrated Low Light™ Color Camera / Optics Packages (Spectra IV)
- 3 Autofocus, High Res Integrated Camera / Optics Packages, Multiple Back Box Models (Spectra IV SE)
- Zones and Window Blanking
- Built-in Surge and Limited Lightning Protection
- Integrated Passive (UTP) Circuit
- Camera title Overlay, 20 User-definable Characters
- On-Screen Compass and Tilt Display
- Freeze Frame During Presets
- Internal Scheduling Clock

Speciality Camera



EMW330-PB8NGR
Mobile Camera



- 1/3" Sony Super HAD CCD,
- 520TVL, IR Camera
- 15Mt, IP 67, 12 VDC



SCB-2020P
Speciality Camera



- 1/3" High Resolution ATM Camera
- 600TV lines
- Min. illumination 0.45Lux/0.15Lux@F2.0 (Color)
- Built-in 3.7mm fixed lens
- 12VDC



SCB -3020P
Speciality Camera



- 1/3" High Resolution ATM Camera
- 600TV lines
- Min. illumination 0.45Lux/0.15Lux@F2.0 (Color)
- Built-in 3.7mm fixed lens
- WDR, VPS
- 12VDC



SCZ-2370P
Speciality Camera



- 137X High Resolution Zoom Camera
- 1/4" Super HAD color CCD
- 37x optical zoom (3.5 ~ 129.5mm) and 16x digital zoom
- High resolution of 600TV lines (Color), 680TV lines (B/W)
- Min. illumination of 0.2Lux@F1.67 (Color)



SCZ-3370P
Speciality Camera



- 1/4" CCD 37x High Resolution Zoom Camera
- High resolution of 600TV lines (Color), 37x zoom (3.5 ~ 129.5mm), Digital 16x,
- True Day & Night (ICR)



WV-CZ392
Speciality Camera

- 36x Optical Zoom Lens
- 1/4" CCD
- 650 TV lines
- Minimum Illumination : Color:0.5 lx (Sens Up: Off, AGC: High), B/W: 0.04 lx (Sens Up: Off, AGC: High)
- 3.3 ~ 119.0 mm at F1.4

Honeywell

HSPT 120P
Speciality Camera



- 530 TVL resolution
- Day/night function
- Digital noise reduction
- Pan 360° endless rotation up to 30°/s, tilt 0°~90° up to 30°/s
- 32 preset positions, six groups of programmable tours

HD CCTV



EQH5200
HD CCTV



- 1/2.5" 2 Megapixel CMOS
- HD-SDI, Full HD 1080@50i, 720@50p
- True Day/Night, 0.02Lux F1.2, OSD
- Dual Voltage (12VDC, 24VAC)
- No Audio
- Indoor Box Camer

CCTV

EverFocus®

EDH5240
HD CCTV



- 1/2.5" 2 Megapixel CMOS
- HD-SDI, Full HD 1080@50i, 720@50p
- True Day/Night, 0.02Lux F1.2, OSD
- Dual Voltage (12VDC, 24VAC)
- No Audio
- Indoor IR Dome

4 Channel DVR

EverFocus®

TUTIS-4F3
4 Channel



- 4Channel DVR, Embedding Linux OS
- H.264 Compression
- Recording D1@ 100fps, HD1@ 100fps, CIF@100fps Real time, Free CMS included
- 12VDC/3A Power supply included

EverFocus®

ECOR264-4F2/4D2
4 Channel



- 4 CH, H.264
- D1 50 FPS, 2CIF real-time, 100 FPS, w/o DVD
- Free CMS Included,
- 12 VDC,
- Power supply included

EverFocus®

ECOR264-4x1FGR/GR/RGR
4 Channel



- 4CH, H.264
- D1 real-time, 100FPS
- no DVD, Free CMS
- 12 VDC
- Power supply included
- CE, FCC, UL Certification

HIKVISION

DS7304HVISNP
4 Channel



- 4 Channel DVR
- Real Time Recording @ CIF Resolution
- 1-Ch RCA Audio input
- 1-Ch RCA Audio output
- 1 HDD Support Internally
- 1-Ch, BNC Composite video output
- 1 VGA interface

HIKVISION

DS7304HFISNP
4 Channel



- 4 Channel DVR
- H.264 Compression
- D1 Recording Resolution
- 1 SATA HDD slot
- Support 1 Channel Audio

HIKVISION

DS-8104HFI-S
4 Channel



- 4 Channel DVR
- H.264 Compression
- Real Time Recording @ 4CIF Resolution
- 8 SATA Port
- Support 4 Channel Audio

HIKVISION

DS-9104HFI-S
4 Channel



- 4 Channel DVR
- H.264 Compression
- Real Time Recording @ 4CIF Resolution
- 8 SATA interface, maximum 4 HDD with DVD
- Support 4 Channel Audio

SAMSUNG
SAMSUNG TECHWIN

SRD-470D
4 Channel



- 4ch CIF real-time DVR
- CIF Resolution real-time recording capability (Full 4CIF resolution recording support)
- Up to 4ch audio inputs and 1ch audio output
- SATA I/F HDD support (Internal Max. HDD x 1)
- DVD R/W
- Built-in web viewer

Panasonic
ideas for life

WJ-HL204
4 Channel



- H.264 Codes for efficient digital video recording
- Real Time Recording @ CIF Resolution (100 ips/sec)
- Flexible Recording Playback Control
- Various Multi Screen Modes Camera Control via RS485
- Resolution : D1 / Half D1 / CIF

Honeywell

HDDVR1004
4 Channel



- H.264 Compression, Multiplex function
- Dual encoding streams support
- Simultaneous playback of multiple channels
- Built-in web server, multi-DVR client
- Real time recording @ CIF resolution

8/9 Channel DVR

EverFocus®

TUTIS-8F3
8/9 Channel



- 8Channel DVR
- Embedding Linux OS
- H.264 Compression technique
- Recording D1@ 50fps, HD1@ 100fps, CIF@ 200fps Real time, Free CMS included
- 12VDC/3A, Power supply included



ECOR264-8F2/8D2
8/9 Channel



- 8 CH, H.264
- D1 50 FPS, CIF real-time, 200 FPS
- Free CMS included
- w/o DVD, 12 VDC
- Power supply included



ECOR264-9x1FGR/GR/RGR
8/9 Channel



- 9CH, H.264
- D1 100FPS, 2CIF real-time, 200fps for any 8 channels
- no DVD,
- Free CMS, 12 VDC
- power supply included
- CE, FCC, UL Certification



DS7308HVISNP
8/9 Channel



- 8 Channel DVR
- Real Time Recording @ CIF Resolution
- 1-Ch RCA Audio input
- 1-Ch RCA Audio output
- 1 HDD Support Internally
- 1-Ch, BNC Composite video output
- 1 VGA interface



DS7308HFISNP
8/9 Channel



- 8 Channel DVR
- H. 264 Compression
- D1 Recording Resolution
- 1 SATA HDD Slot
- Support 1 Channel Audio



DS-8108HFI-S
8/9 Channel



- 8 Channel DVR
- H.264 Compression
- Real Time Recording @4CIF Resolution
- 8 SATA Port
- Support 8 Channel Audio



DS-9108HFI-S
8/9 Channel



- 8 Channel DVR
- H.264 Compression
- Real Time Recording @ 4CIF Resolution
- 8 SATA interface, maximum 4 HDD with DVD burner bracket by default
- Support 8 Channel Audio



SRD-850D
8/9 Channel



- 8ch DVR
- H.264, 200 (PAL)ips recording rate, Up to 8ch audio inputs and 1ch audio outputs
- Max 5 internal HDD (HDD x 5), DVD-RW, Built-in web viewer



WJ-HL208
8/9 Channel



- H.264 Codec for efficient digital video recording
- Real Time Recording @ CIF Resolution (200 ips/sec)
- Flexible Recording Playback Control
- Various Multi Screen Modes Camera Control via RS485
- Resolution : D1 / Half D1 / CIF



HDDVR1008
8/9 Channel



- 8 Channel DVR
- H.264 Compression
- 1 Built in SATA Port, Support-HDD
- Support 1st Channel D1 Resolution Recording

16 Channel DVR



TUTIS-16F3
16 Channel



- 16Channel DVR
- H.264 Compression
- Recording D1@ 100fps, HD1@200fps, CIF@ 400fps Real time, Free CMS included
- 12VDC/5A, Power supply include



ECOR26416x1FGR
16 Channel



- 16CH, H.264
- 100FPS, CIF real-time
- Free CMS, 12VDC, Power supply included



ECOR264-16x1FGR/GR/RGR
16 Channel



- 16CH, H.264
- D1 100FPS, CIF real-time 400 FPS
- no DVD, Free CMS, 12VDC
- Power supply included
- CE, FCC, UL Certification



EPARA16X4GR/RGR

16 Channel



- 16 Channel, H.264
- 400FPS with D1
- Ethernet, Pentaplex with DVD-RW
- HDMI Port, SATA, eSATA support
- 100 VAC-240 VAC
- CE, FCC, UL certification



DS7316HVISNP

16 Channel



- 16 Channel DVR
- Real Time Recording @ CIF Resolution
- 1-Ch RCA Audio input
- 1-Ch RCA Audio output
- 1 HDD Support Internally
- 1-Ch, BNC Composite video output
- 1 VGA interface



DS8116HCIST

16 Channel



- 16 channel DVR
- 16 Channel video and audio
- Support Dual-Stream and Multi-channel playback



DS-8116HFI-S

16 Channel



- 16 Channel DVR
- H.264 Compression
- Real Time Recording @ 4CIF Resolution
- Support 16 Channel Audio



DS-9116HFI-S

16 Channel



- 16 Channel DVR
- H.264 Compression
- Real Time Recording @ 4CIF Resolution
- 8 SATA interface, maximum 4 HDD with DVD burner bracket by default
- Support 16 Channel Audio



SRD-1650D

16 Channel



- 16ch DVR, H.264
- 400 (PAL)fps recording rate
- Up to 16ch audio inputs and 1ch audio outputs, Max 5 internal HDD (HDD x 5), DVD-RW
- Built-in web viewer



SAMSUNG TECHWIN

SRD-1630D

16 Channel



- 16ch DVR, H.264
- 200 (PAL)fps recording rate
- Up to 4ch audio inputs and 1ch audio output, MAX 5 internal HDD (HDD x 5)
- Built-in web viewer, DVD R/W



SRD-1670D

16 Channel



- 16ch DVR, H.264
- 400 (PAL)fps recording rate
- Up to 16ch audio inputs and 1ch audio outputs, Max 5 internal HDD (HDD x 5), DVD-RW
- Built-in web viewer



WJ-HD716

16 Channel



- H.264 Codec
- Dual HDMI Full High Definition 1080i Display
- Real Time Recording
- 16 Channel 2x Monitor Real Time Live
- Super dynamic 5 Link with Intelligent Video motion Detection Alarm



HDDVR1016

16 Channel



- H.264 Compression, Multiplex function
- Realtime live display, record 25 fps @ CIF, few @4CIF
- Dual Stream
- Simultaneous playback of multiple channels
- Privacy masking, camera lock, color setting, and title display
- Built-in web server, multi-DVR client



HD-16DVR-C

16 Channel



- H.264 Compression
- 400fps Real-time Recording @ CIF resolution
- Embedded Linux OS
- 16 Audio In
- Multi Networking with Dual encoding over network
- External storage through eSATA interface



DX4500 / DX4600 Series

8/16 Channel



- 8 or 16 Channel Digital Video Recorder
- MPEG4 compression, upto 704 x 576 (PAL) recording resolution
- Up to 400 images per second recording
- Up to 6 TB of Hard drive storage
- Partition recording
- Up to 4 Audio inputs and 1 Audio output
- CE and UL Certified






EMV200

Mobile DVR

- 2 Channel H.264 compact Mobile DVR with SD card storage, anti-shock cover
- Embedded GPS module and GPS antenna, 8V~36VDC
- Surge Protection



EMV400

Mobile DVR


- 4 Channel H.264 1-compact mobile DVR, removable HD for easy playback on PC, external EDGE/GPRS/CDMA/WI-FI for wireless transmission, anti-shock & vibration,
- 8V~36 VDC, embedded GPS module & G-Sensor ethernet 10/100 Base-T



EMV800

Mobile DVR


- 8 channel H.264, simplex Mobile DVR, 240 FPS @ D1 Explosion proof USB black box option
- Removable HD for easy playback on PC
- External EDGE/GPRS/CDMA Module for wireless transmission, 8~36VDC, embedded GPS module & G-Sensor



EMV1200

Mobile DVR

- 12 channel H.264, simplex Mobile DVR, 240 FPS @ D1 Explosion proof USB black box option
- Removable HD for easy playback on PC
- External EDGE/GPRS/CDMA Module for wireless transmission, 8~36VDC, embedded GPS module & G-Sensor



Monitors



SMT-1712P

LCD

- 17" TFT-LCD VGA only Monitor for CCTV use



SMT-1912P

LCD

- 19" TFT-LCD VGA only Monitor for CCTV use



Lens



CLCS2812A

Vari Focal Lens

- 1/3", f= 2.8 ~ 12mm
- F1.4, Auto Iris, CS



CLCS0550A

Vari Focal Lens

- 1/3", f= 5 ~ 50 mm
- F1.4, Auto Iris, CS



CLCS3580A

Vari Focal Lens

- 1/3", f= 3.5 ~ 8 mm
- F1.4, Auto Iris, CS



CLCS3580M

Vari Focal Lens

- 1/3", f= 3.5 ~ 8 mm
- F1.4, Manual Iris, CS



SLA-3580DN

Vari Focal Lens

- DC Type Auto iris
- Varifocal 3.5 ~ 8 mm, CS Mount
- IR-Corrected lens for perfect Day & Night Surveillance
- Extra low dispersion & Aspherical lens for clearer images



SLA - 550DA

Vari Focal Lens

- DC Type Auto iris
- Varifocal 5 ~ 50 mm, CS Mount
- Excellent Low Light Performance





SAMSUNG
SAMSUNG TECHWIN



SLA-2810D
Vari Focal Lens

- DC Type Auto iris
- Varifocal 2.8 ~ 10 mm, CS Mount
- Excellent Low Light Performance

Honeywell

GLD28V100CS
Vari Focal Lens



- Vari-focal lens
- 2.8 ~ 10.0mm
- DC irjs
- CS-mount

Honeywell

HLD29V8DNL
Vari Focal Lens



- 1/3" CS-Mount,
- DC Auto Iris,
- 2.9-8mm Varifocal
- F0.95, Long Lead,
- IR Corrected for D/N camera

Honeywell

HLD27V13DNL
Vari Focal Lens



- 1/3" CS-Mount,
- DC Auto Iris,
- 2.7-13.5mm Varifocal
- F1.3, Long Lead,
- IR Corrected for D/N camera

Honeywell

GLD50V500CS
Vari Focal Lens



- Vari-focal lens
- 5.0 ~ 50.0mm
- DC iris
- CS-mount

Honeywell

HLD28V8F95L
Vari Focal Lens



- 1/3" CS-Mount,
- DC Auto Iris, 540TVL,
- 2.8-8mm Varifocal
- F0.95, Long Lead

Honeywell

HLD5V50DNL
Vari Focal Lens



- 1/3" CS-Mount,
- DC Auto Iris,
- 5-50mm Vari Focal
- F1.6, Long Lead,
- IR corrected for D/N camera

Keyboard/Controllers

EverFocus®

EKB500
Keyboard



- Universal Control Keyboard for DVR and Speed Dome, 3 Axis, PAL

HIKVISION

DS-1000KI
Keyboard



- IP Keyboard (Network Keyboard)
- Control Mode : UTP, RS485

HIKVISION

DS-1002KI
Keyboard



- Standard Keyboard (2 dimension)

HIKVISION

DS-1003KI
Keyboard



- Standard Keyboard (3 dimension)

SAMSUNG
SAMSUNG TECHWIN

SPC-2000
Keyboard



- USB, System Controller



SAMSUNG
SAMSUNG TECHWIN

SPC-1010
Keyboard

- System Controller



SAMSUNG
SAMSUNG TECHWIN

SPC-6000
Keyboard

- Touch LCD, 255 Unit Control, Detached joystick



Panasonic
ideas for life

WV-CU650
Keyboard

- Smooth Operation of PS Data interface device
- Integrated System Control – Camera Recorder and Switcher
- User Level Management and user Assignable Buttons
- Universal Design for right or left handed



Panasonic
ideas for life

WV-CU950
Keyboard

- Smooth Operation of Ethernet / PS Data interface device
- Integrated System Control – Camera Recorder and Switcher
- User Level Management and user Assignable Buttons
- Support Panasonic Management Software ASM-100



Honeywell

HTX5000
Keyboard

- Support ScanDome™ III
- Maximum 7 slave controller
- Full programming of ScanDome™ III
- Support two levels of password
- Keyboard Lock / Unlock
- DC12V, 5W



KBD300A
Keyboard

- Desktop push button/joystick control keypad for PTZ



Housing Mounts and Brackets

SAMSUNG
SAMSUNG TECHWIN

STB-400
Mounts and Brackets

- All aluminum construction
- Operating Humidity : 0 to 90% RH (non-condensing)



SAMSUNG
SAMSUNG TECHWIN

SHB-4200H

- Housing
- External Dimensions 148 x 107 x 421 mm
- Internal Dimensions 84 x 69 x 319 mm
- Operating Temp : - 35 dec C ~ + 50 deg C



SAMSUNG
SAMSUNG TECHWIN

SHB-4300H

- IP 66 Housing
- External Dimensions 184 x 127 x 460 mm
- Internal Dimensions 100 x 80 x 383 mm
- Input Voltage 24 VAC
- Operating Temp : - 35 dec C ~ + 50 deg C.



Honeywell

GHG140
Housings

- Indoor housing, 100(W)x80(H)x350(D)mm,
- Weight: 1.5kg



Honeywell

GHG120
Housings

- Indoor housing, 93(W)x68(H)x300(D)mm,
- Weight: 1.3kg



Honeywell

GHG210S
Housings

- Outdoor housing with Sunshield, IP54
- Dimension 110(w)x100(H)x350(D)mm
- Weight: 2.8kg





Honeywell

GHG140S

Housings



- Indoor/outdoor housing
- Sunshield
- Weight: 2.0kg

Honeywell

GHG210SHB220

Housings



- Outdoor housing with Sunshield, IP54
- Heater and Blower Included
- Dimension: 110(w)x100(H)x350(D)mm
- Weight: 3.1kg
- Power: 220VAC



EH1512 Series Enclosure

Housings



- Small, sleek, contemporary design
- High reliability die cast aluminum construction
- Tethered lid
- Meets IP66 and NEMA Type 4X standards
- Easy access for servicing and installation
- Models available with factory installed heater / blower with 24 VAC Camera PSU

Surveillance Hard Disks



Western
Digital

WD5000AVDS/WD10EUCX/WD20EURS
Storage Devices



- 500 GB/1TB/2TB HDD
- AV Hard Drive ment for surveillance application
- Ideal for 24X7 Operation

Power Supplies



PS512NABS

- 12V, 0.5 Amp. without rechargeable Ckt.
With ABS Box, Power Supply Adaptor

PS1012NABS

- 12V, 1 Amp. without rechargeable Ckt.
With ABS Box, Power Supply Adaptor

PS1512NABS

- 12V, 1.5 Amp. without rechargeable Ckt.
With ABS Box, Power Supply Adaptor

PS0212N

- 12V, 2 Amp. without rechargeable Ckt. With MS Box

PS0312N

- 12V, 3 Amp. without rechargeable Ckt. With MS Box

PS0412N

- 12V, 4 Amp. without rechargeable Ckt. With MS Box

PS0512N

- 12V, 5 Amp. without rechargeable Ckt. With MS Box



PS0224NAC

- 24V, 2.0 Amp.AC Linear Power Supply with Box

PS0324NAC

- 24V, 3.0 Amp.AC Linear Power Supply with Box



PSM512/4

- 12V, 0.5 Amp. without rechargeable Ckt.
With 4 Output

PSM512/8

- 12V, 0.5 Amp. without rechargeable Ckt.
With 8 Output

PSM512/16

- 12V, 0.5 Amp. without rechargeable Ckt.
With 16 Output

PSM1012/4

- 12V, 1.0 Amp. without rechargeable Ckt.
With 4 Output

PSM1012/8

- 12V, 1.0 Amp. without rechargeable Ckt.
With 8 Output

PSM1012/16

- 12V, 1.0 Amp. without rechargeable Ckt.
With 16 Output

CCTV



rayTEC[®]

RM300-AI-XX



- RAYMAX Infra-Red LED illuminator designed to work in conjunction with any B&W or day/night camera delivering excellent images at night.
- Triple panel unit, available in 10°, 30°, 50° & 120° options, includes PSU with control features (add -10/-30/-50-120 to part code).
- 940nm covert options also available.
- Distances up to 370m (1,214ft), Vandal Resistant
- Adaptive Illumination™ & 360° Coverage with 2 units

rayTEC[®]

RM200-AI-XX



- RAYMAX Infra-Red LED illuminator designed to work in conjunction with any B&W or day/night camera delivering excellent images at night.
- Available in 10°, 30°, 50° & 120° options, includes PSU with control features (add -10/-30/-50-120 to part code).
- Distances up to 300m (985ft), Vandal Resistant
- Adaptive Illumination™

rayTEC[®]

RM100-AI-XX



- RAYMAX Infra-Red LED illuminator designed to work in conjunction with any B&W or day/night camera delivering excellent images at night.
- Available in 10°, 30°, 50° & 120° options, includes PSU with control features (add -10/-30/-50-120 to part code).
- 940nm covert options also available.
- Distances up to 150m (492ft), Vandal Resistant
- Adaptive Illumination™

rayTEC[®]

RM50-AI-XX



- RAYMAX Infra-Red LED illuminator designed to work in conjunction with any - B&W or day/night camera delivering excellent images at night.
- Available in 10°, 30°, 50° & 120° options, includes PSU with control features (add -10/-30/-50-120 to part code).
- 940nm covert options also available.
- Distances up to 40m (131ft), Vandal Resistant
- Adaptive Illumination™

rayTEC[®]

RM25-XX



- RAYMAX Infra-Red LED illuminator designed to work in conjunction with any B&W or day/night camera delivering excellent images at night.
- Available in 10°, 30°, 50° & 120° options, includes PSU with control features (add -10/-30/-50-120 to part code).
- 940nm covert options also available.
- Distances up to 20m (66ft), Vandal Resistant

great deals & greater savings!



Never miss the hottest deals on security products. Get hold of the latest issue of ADI hot offers from your nearest ADI branch now.



PoE LED Lighting

rayTEC[®]

RM50-XX-IP



RAYMAX Infra-Red, High Power PoE, LED lighting provides dedicated lighting for network cameras via a PoE (Power over Ethernet) enabled infrastructure. With an in-built photocell plus internal 'Command and Control™' electronics the RAYMAX 50 HP PoE is truly plug and play, available in 10°, 30°, 50° & 120° options (add -10/-30/-50-120 to part code). 940nm covert options also available.

- Distances up to 60m (197ft)
- PoE input
- Integrated PSU
- Internal and External options
- IP66 Rated
- Vandal resistant

rayTEC[®]

RM25-XX-IP




- RAYMAX Infra-Red, PoE LED lighting provides dedicated lighting for network cameras via a PoE (Power over Ethernet) enabled infrastructure.
- Available in 10°, 30°, 50° & 120° options (add 10/-30/-50-120 to part code)

- 940nm covert options also available. (Internal Applications Only)
- Distances up to 30m (98ft)
- PoE input, Integrated PSU
- Vandal resistant, IP66 Rated

rayTEC[®]

VARIO-i6 / VARIO-i4 / VARIO-i2



- The VARIO Infra-Red range of illuminators allow users to adjust the output angle of an illuminator on site to a precise and pre-defined angle through a sophisticated VARIO optical system.

- An optional hand held remote control is available for VARIO. A single remote can operate multiple units and delivers access to advanced features including an on-board status system to report the operational status of the illuminator.
- VARIO illuminators are powered directly from 12-24V.